

Printer (optional)

- Built-in thermal printer
- Paper width 112 mm / 4.4 in
- Printer operating temperature:
0 °C – +50 °C / 32 °F – +122 °F
- Printer density is guaranteed in this range:
5 °C – +40 °C / 41 °F – +104 °F
20 – 85% relative humidity, non condensing

Applicable Standards

- Installation/Overtoltage category: II
- Pollution degree: 2
- Safety: LVD 2014/35/EU (CE Conform)
Standard EN 61010-1:2001
- EMC: Directive 2014/30/EU (CE Conform)
Standard EN 61326-1:2006

All specifications herein are valid at ambient temperature of + 25 °C and recommended accessories.
Specifications are subject to change without notice.



H winding test cable set



X winding test cable set



Transport case



Plastic transport case



Cable plastic case – large size



Cable plastic case with wheels – large size




Cable plastic case – medium size



Cable plastic case with wheels – medium size



TRTC Verification Calibrator

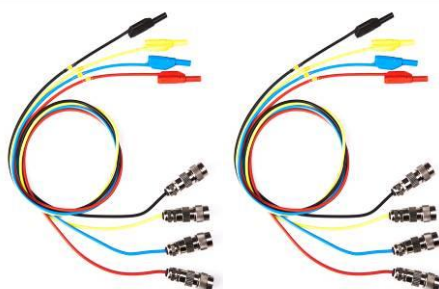

TRTC cables with banana plugs



Cable bag

Order Info

| Instrument | Article No |
|--|--------------|
| True Three-phase Transformer Turns Ratio Tester TRT30A | TRT30AX-N-00 |
| True Three-phase Transformer Turns Ratio Tester TRT30B | TRT30BX-N-00 |
| True Three-phase Transformer Turns Ratio Tester TRT30C | TRT30CX-N-00 |
| True Three-phase Transformer Turns Ratio Tester TRT33A | TRT33AX-N-00 |
| True Three-phase Transformer Turns Ratio Tester TRT33B | TRT33BX-N-00 |
| True Three-phase Transformer Turns Ratio Tester TRT33C | TRT33CX-N-00 |

| Included accessories |
|--|
| Windows-based DV-Win PC software including USB cable |
| Tap changer control cable 5 m (16.4 ft) |
| Mains power cable |
| Ground (PE) cable |

| Recommended accessories | Article No |
|--|--------------|
| H winding test lead set, 4 x 10 m (32.8 ft) with TTA clamps (compatible with TWA and TRT series) | HC-10-4LMCWC |
| X winding test lead set, 4 x 10 m (32.8 ft) with TTA clamps (compatible with TWA and TRT series) | XC-10-4LFCWC |
| Cable plastic case – large size | CABLE-CAS-03 |
| Transport case | HARD-CASE-LC |

| Optional accessories | Article No |
|--|--------------|
| H winding test lead set, 4 x 5 m (16.4 ft) with TTA clamps (compatible with TWA and TRT series) | HC-05-4LMCWC |
| X winding test lead set, 4 x 5 m (16.4 ft) with TTA clamps (compatible with TWA and TRT series) | XC-05-4LFCWC |
| H winding test lead set, 4 x 15 m (49.2 ft) with TTA clamps (compatible with TWA and TRT series) | HC-15-4LMCWC |
| X winding test lead set, 4 x 15 m (49.2 ft) with TTA clamps (compatible with TWA and TRT series) | XC-15-4LFCWC |
| H winding test lead set, 4 x 20 m (65.6 ft) with TTA clamps (compatible with TWA and TRT series) | HC-20-4LMCWC |
| X winding test lead set, 4 x 20 m (65.6 ft) with TTA clamps (compatible with TWA and TRT series) | XC-20-4LFCWC |
| H winding cable extension set, 4 x 5 m (16.4 ft) (compatible with TWA and TRT series) | HE-05-4LMCFC |
| X winding cable extension set, 4 x 5 m (16.4 ft) (compatible with TWA and TRT series) | XE-05-4LFCMC |
| H winding cable extension set, 4 x 10 m (32.8 ft) (compatible with TWA and TRT series) | HE-10-4LMCFC |
| X winding cable extension set, 4 x 10 m (32.8 ft) (compatible with TWA and TRT series) | XE-10-4LFCMC |

| | |
|--|--------------|
| H winding cable extension set, 4 x 15 m (49.2 ft) (compatible with TWA and TRT series) | HE-15-4LMCFC |
| X winding cable extension set, 4 x 15 m (49.2 ft) (compatible with TWA and TRT series) | XE-15-4LFCMC |
| H winding test lead set, 4 x 5 m (16.4 ft) with TTA clamps (compatible with TRT series only) | HC-05-4TRTMW |
| X winding test lead set, 4 x 5 m (16.4 ft) with TTA clamps (compatible with TRT series only) | XC-05-4TRTFW |
| H winding test lead set, 4 x 10 m (32.8 ft) with TTA clamps (compatible with TRT series only) | HC-10-4TRTMW |
| X winding test lead set, 4 x 10 m (32.8 ft) with TTA clamps (compatible with TRT series only) | XC-10-4TRTFW |
| H winding test lead set, 4 x 15 m (49.2 ft) with TTA clamps (compatible with TRT series only) | HC-15-4TRTMW |
| X winding test lead set, 4 x 15 m (49.2 ft) with TTA clamps (compatible with TRT series only) | XC-15-4TRTFW |
| H winding test lead set, 4 x 20 m (65.6 ft) with TTA clamps (compatible with TRT series only) | HC-20-4TRTMW |
| X winding test lead set, 4 x 20 m (65.6 ft) with TTA clamps (compatible with TRT series only) | XC-20-4TRTMW |
| H winding cable extension set, 4 x 5 m (16.4 ft) (compatible with TRT series only) | HE-05-4TRTMF |
| X winding cable extension set, 4 x 5 m (16.4 ft) (compatible with TRT series only) | XE-05-4TRTFM |
| H winding cable extension set, 4 x 10 m (32.8 ft) (compatible with TRT series only) | HE-10-4TRTMF |
| X winding cable extension set, 4 x 10 m (32.8 ft) (compatible with TRT series only) | XE-10-4TRTFM |
| H winding cable extension set, 4 x 15 m (49.2 ft) (compatible with TRT series only) | HE-15-4TRTMF |
| X winding cable extension set, 4 x 15 m (49.2 ft) (compatible with TRT series only) | XE-15-4TRTFM |
| Cable plastic case – small size | CABLE-CAS-01 |
| Cable plastic case – medium size | CABLE-CAS-02 |
| Cable plastic case with wheels – medium size | CABLE-CAS-W2 |
| Cable plastic case with wheels – large size | CABLE-CAS-W3 |
| Plastic transport case | HARD-CASE-PC |
| Plastic transport case with wheels | HARD-CASE-PW |
| Built-in thermal printer 112 mm (4.4 in) | PRINT-112-00 |
| Thermal paper roll 112 mm (4.4 in) | PRINT-112-RO |
| Bluetooth communication module | BLUET-MOD-01 |
| Inverter 12 V DC to 230 V AC, 50 Hz | IN650-12-230 |
| Verification Calibrator TRTC | TRTC-05-4800 |
| H winding test lead set, 4 x 1 m (3.28 ft) with banana plugs | HC-01-4LMCBP |
| X winding test lead set, 4 x 1 m (3.28 ft) with banana plugs | XC-01-4LFCBP |
| Cable bag | CABLE-BAG-00 |
| TWA-TRT safety switchbox with ground cable | SWTCH-BOX-00 |
| H connection between instrument and switchbox, 4 x 0,8 m (2.62 ft) | HE-08-4LMCMC |
| X connection between instrument and switchbox, 4 x 0,8 m (2.62 ft) | XE-08-4LFCFC |



Tel: (81) 9688-1000 /01 /02 & 03

Correo: widagg@widagg.com.mx

Pagina: www.widagg.com.mx